


Test Conditions:
 High Voltage Test: 300V Volt
 Insulation Resistance: 10.0M ohm
 Conduction Resistance: 5.0ohm
 Features: Finished product to be done 100% of the electrical test, and without any open circuit/short circuit, mismatch and electrical flash

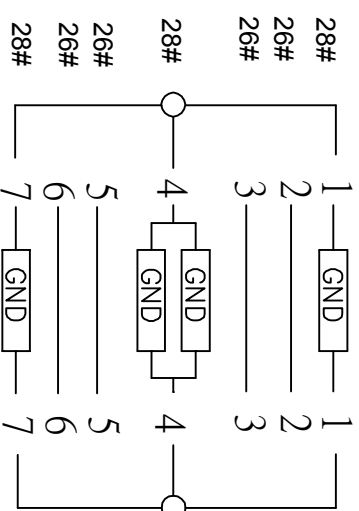

NO.	Description
P1	SATA 7P male straight connector, terminal 15 U, with gold plated latching
P2	SATA 7P male straight connector, terminal 15 U, with gold plated latching
C	SATA cable UL21149 26#(4/0.404TC+4/0.32TC)+AL OD:7.5*2.1MM
N	Net jacket, nylon braiding tube red

DLOCK®
 we move the world
 Cable SATA straight - straight
 Premium

83688 / 83689 / 83690 / 83691 / 83692

88031