
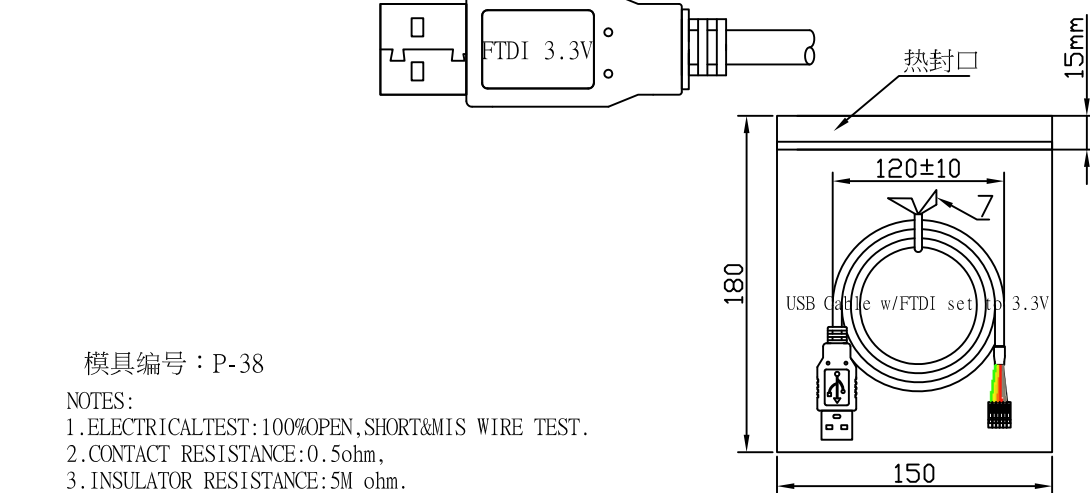


| REV | ECRN | DATE |
|-----|----------------|----------|
| 1 | NEW PRODUCTION | 20150512 |
| 2 | NEW PRODUCTION | 20180315 |
| | | |

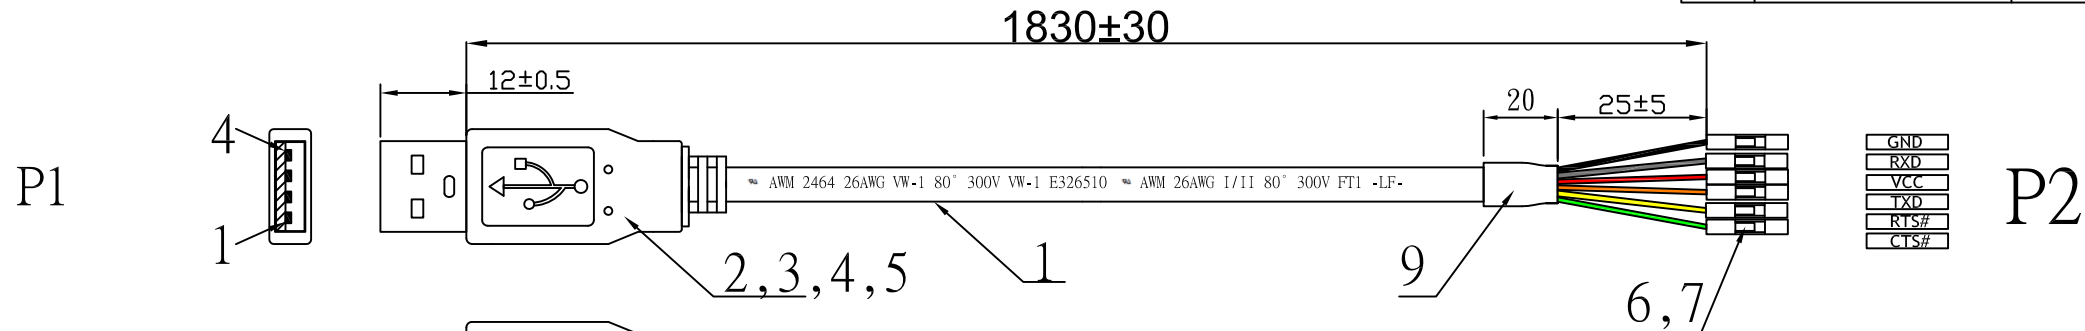


模具编号：P-38

- NOTES:
- 1.ELECTRICAL TEST:100%OPEN,SHORT&MIS WIRE TEST.
 - 2.CONTACT RESISTANCE:0.5ohm,
 - 3.INSULATOR RESISTANCE:5M ohm.
 - 4.HIGH VOLTAGE:DC 300V 0.01sec.
 - 5.MUST BE ROHS COMPLIANT.


TTL--PCB

TOP



1 2 3

BOTTOM



4 5 6

PIN WIRING

| P1 | | P2 |
|----|---------|---------|
| 1 | RED(5V) | 3(VCC) |
| 2 | ORANGE | 4(TXD) |
| 3 | YELLOW | 5(RXD) |
| 4 | GREEN | 6(RTS#) |
| 5 | BLACK | 1(GND) |
| 6 | BROWN | 2(CTS#) |

| ⑩ | I.180150.0300R | PE BAG | 180*150*0.04MM PE BAG PRINTED BLACK FONT" | 1 | PCS |
|-----|----------------|-----------|--|-------|------|
| ⑨ | F.0501B0.0100R | TUBE | Ø5.5*20mm HEAT TUBE COLOR BLACK | 1 | PCS |
| ⑧ | I.000001.0400R | TIE | TIE BLACK L=70MM | 1 | PCS |
| ⑦ | E.00254M.0100R | HOUSING | Dupont 2.54mm 1*1P HOUSING | 6 | PCS |
| ⑥ | D.00254F.1400R | TERMINAL | Dupont 2.54mm TERMINAL | 6 | PCS |
| ⑤ | C.045P01.0100R | MOLDING | PVC 45P BLACK | 5.5 | G |
| ④ | C.000000.0000R | MOLDING | PE | 2.5 | G |
| ③ | J.000008.0500R | TIN WIRE | TIN WIRE OD:0.8MM | 3.5 | G |
| ② | B.01004M.0N06R | CONNECTOR | TTL-PCB(3.3V) USB A/M CONNECTOR PLASTIC: BLACK | 1 | PCS |
| ① | A.009X01.0603R | CABLE | UL2464 26AWG(7/0.16TC)*6C(RED,ORANGE,GREEN, BLACK,YELLOW,BROWN)+AL FOIL PVC JACKET COLOR:BLACK OD=5.0±0.1mm L=1830MM | 1 | PCS |
| NO. | PART NO | ITEM | DESCRIPTION | Q' TY | UNIT |

DELOCK
we move the world

Title: Converter USB 2.0 male > TTL 6 pin
pin header female separate 1.8 m (3.3 V)

| | | | |
|------------|----------------|----------|---------------|
| Date | 2018 / 02 / 01 | Item no. | 83787 |
| Unit | mm | Barcode | 4043619837878 |
| Projection | | File No. | 88203 |
| Rev | A | | |