



REV	ECRN	DATE
1	NEW PRODUCTION	20150424
2	NEW PRODUCTION	20180315

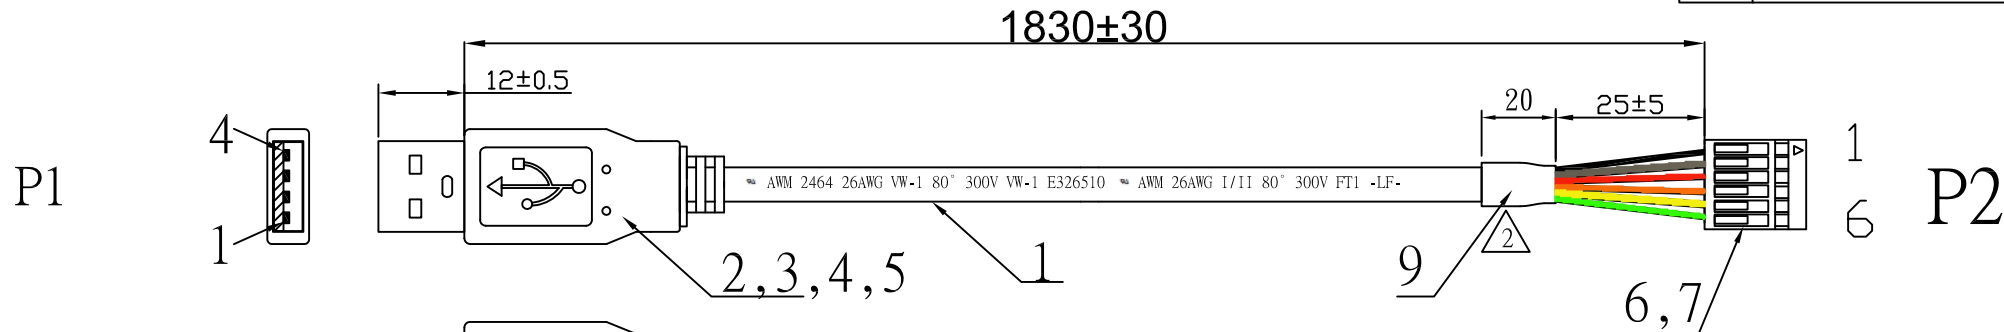

模具编号：P-38

- NOTES:
- 1.ELECTRICAL TEST:100%OPEN,SHORT&MIS WIRE TEST.
 - 2.CONTACT RESISTANCE:0.5ohm,
 - 3.INSULATOR RESISTANCE:5M ohm.
 - 4.HIGH VOLTAGE:DC 300V 0.01sec.
 - 5.MUST BE ROHS COMPLIANT.

⑩	I.180150.0300R	PE BAG	180*150*0.04MM PE BAG PRINTED BLACK FONT"	1	PCS
⑨	F.0501B0.0100R	TUBE	∅5.5*20mm HEAT TUBE COLOR BLACK	1	PCS
⑧	I.000001.0400R	TIE	TIE BLACK L=70MM	1	PCS
⑦	E.00254M.0600R	HOUSING	Dupont 2.54mm 1*6P HOUSING	1	PCS
⑥	D.00254F.1400R	TERMINAL	Dupont 2.54mm TERMINAL	6	PCS
⑤	C.045P01.0100R	MOLDING	PVC 45P BLACK	5.5	G
④	C.000000.0000R	MOLDING	PE	2.5	G
③	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	3.5	G
②	B.01004M.0N06R	CONNECTOR	TTL-PCB(3.3V) USB A/M CONNECTOR PLASTIC: BLACK	1	PCS
①	A.009X01.0603R	CABLE	UL2464 26AWG(7/0.16TC)*6C(RED,ORANGE,GREEN, BLACK,YELLOW,BROWN)+AL FOIL PVC JACKET COLOR:BLACK OD=5.0±0.1mm L=1830MM	1	PCS
NO.	PART NO	ITEM	DESCRIPTION	Q' TY	UNIT

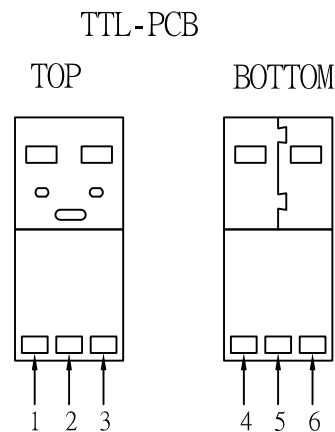

PIN WIRING

P1		P2
1	RED(5V)	3(VCC)
2	ORANGE	4(TXD)
3	YELLOW	5(RXD)
4	GREEN	6(RTS#)
5	BLACK	1(GND)
6	BROWN	2(CTS#)

DELOCK® we move the world			
Title: Converter USB 2.0 male > TTL 6 pin pin header female 1.8 m (3.3 V)			
Date	2018 / 02 / 01	Item no.	83785
Unit	mm	Barcode	4043619837854
Projection		File No.	88203
Rev	A		

Date	2018 / 02 / 01
Unit	mm
Projection	
Rev	A