
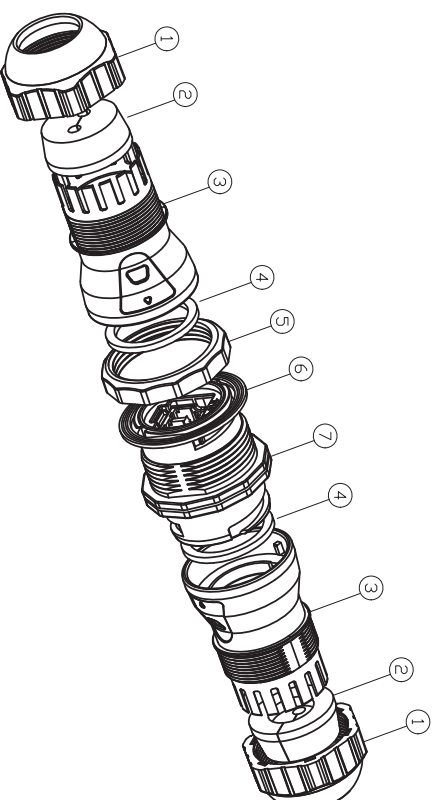
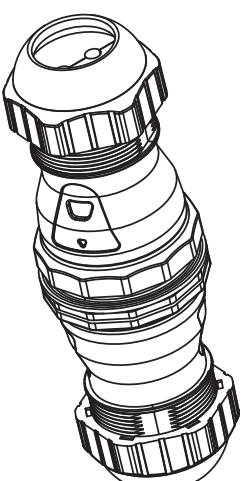

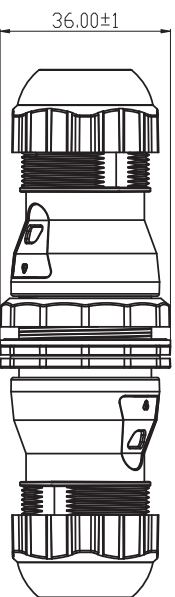
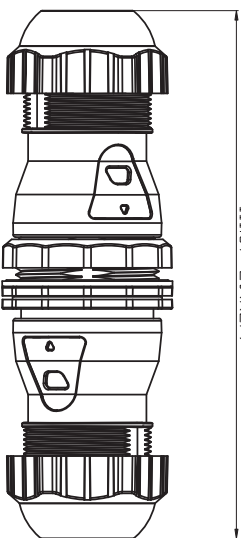


RECOMMENDED  
PNAEL CUTOUT



ELECTRICAL  
CURRENT RATING : 1.5A  
DIELECTRIC WITHSTANDING VOLTAGE : 1000VAC 60HZ  
INSULATION RESISTANCE : 500 MΩ MIN.  
CONTACT RESISTANCE : 20 mΩ MAX.  
MECHANICAL  
(1) (3) (5) PA66  
(7) PA+GF  
(2) (4) (6) SILICONE RUBBER  
Supporting cable diameter: 2.8~3.2mm

Dat	2024 / 05 / 21	Title: Optical Fiber Cable Connector LC Duplex female to LC Duplex female	
Unit	mm	Item no.	67046
Projection		Barcode	4043619670468
Rev	A	File No.	88467

**DLOCK**  
we move the world