


Navilock GNS401 MT3329 TTL+USB GPS Engine Module

Description

This engine module concerns a complete GNSS receiver and including a patch.....

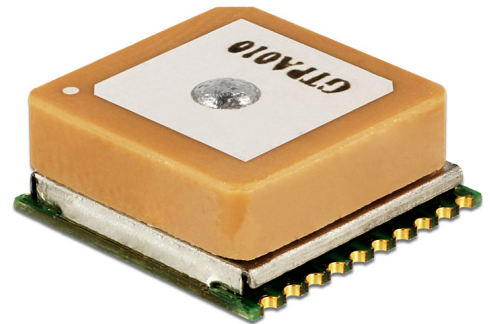

Item no. 60547

EAN: 4037735104655

Country of origin:
GERMANY

Package: Retail Box

Special features

- USB 2.0 + LVTTTL
- Vcc 3,2 V bis 5 V
- Up to 5 Hz

Technical details

- Chipset: MT3329
- N_{avg} -165 dB
- LVTTTL und USB 2.0
- Concurrent receipt 22/Tracking, 66/Acquisition Satelliten
- NMEA: GPRMC, GPGSA, GPGSV, GPGGL, GPVTG (default)
- DGPS/RTCM or SBAS (RTCM 104, 107, 110, 114, 118, 121, 122, 123, 124, 129, 130, 132, 134, 135, 138, 146, 147, 148, 154, 162, 163, 164, 167, 170, 171, 175, 177, 178, 180, 181, 182, 183, 184, 186, 188, 190, 191, 192, 194, 196, 197, 198, 199, 202, 203, 205, 206, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255)
- Position accuracy 2,50 m
- Update Rate 1/s, 9600 bps (default)
- Real time clock intern (RTC)
- A-GPS (Internet required)
- TTFF (Time to first FIX)
 - Cold 35s
 - Warm 34s
 - Hot 1s

- Stromaufnahme tracking: 37 mA @ 3,30 V
 - Abmessungen: 16,00 x 16,00 x 6,00 mm
 - Patchantenne 15,00 x 15,00 x 4,00 mm
 - Betriebstemperatur: -40 °C ~ 85 °C
-

Package content

- GNSS Module
 - CD
-

Images

