


Delock Converter M.2 Key A+E male > 1 x Mini PCIe Slot half size / full size with flexible cable

Description

This converter by Delock changes the M.2 key A or key E interface into a Mini PCIe interface. Different Mini PCIe modules with USB and PCIe signals (e.g. WLAN, Bluetooth, GNSS, 3G, HSPA and NFC modules) can be inserted in the converter. Further it is possible to use both functions of a module which has e.g. WLAN and Bluetooth.

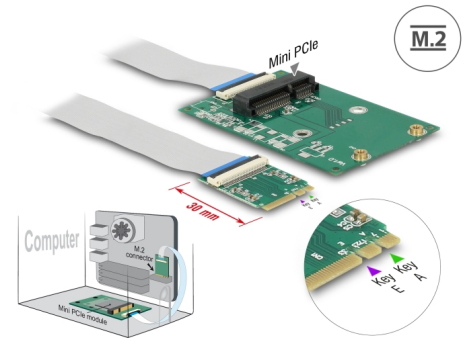

Item no. 62848

EAN: 4043619628483

Country of origin: China

Package: Retail Box

Technical details

- Connector:
 - 1 x 59 pin M.2 key A+E male >
 - 1 x Mini PCIe slot
- PCI Express Rev. 1.1
- Interface: PCIe + USB
- Form factor M.2: 2230
- Form factor Mini PCIe: half size and full size
- Suitable for M.2 slot with key A or key E based on PCIe and USB
- Operating temperature: 0 °C ~ 80 °C
- Dimensions (LxWxH):
 - M.2 board: ca. 30 x 22 x 3 mm
 - Mini PCIe board: ca. 69 x 45 x 6 mm
- OS independent, no driver installation necessary


System requirements

- One free M.2 key A or key E slot

Package content

- Converter board M.2
- Mini PCIe board
- 3 x flat cable, length ca.: 1 x 10 cm, 1 x 20 cm, 1 x 30 cm
- Screws
- User manual

Images



General

| | |
|-----------------------------|--|
| Form factor: | M.2 2230 Mini PCIe full size Mini PCIe half size |
| Supported operating system: | OS independent, no driver installation necessary |
| Slot: | PCIe USB |

Interface

| | |
|--------------|-----------------------------|
| Connector 1: | 1 x 59 pin M.2 key A+E male |
| Connector 2: | 1 x Mini PCIe slot |