


Delock 2.5" Converter SATA 22 pin > 1 x mSATA / 1 x CFast - 9.5 mm

Description

This converter by Delock enables the connection of an mSATA SSD in half size or full size format or a CFast memory card. If both slots are occupied, only the mSATA SSD can be used. The converter can be installed into the system through the SATA interface.

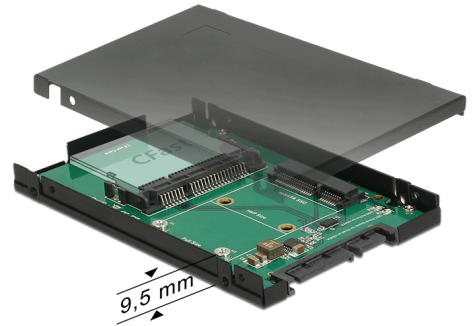

Item no. 62862

EAN: 4043619628629

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Connectors:
 - 1 x SATA 6 Gb/s 22 pin plug >
 - 1 x mSATA slot (half size / full size)
 - 1 x CFast slot
- Supports CFast 1.0 and 2.0
- Maximum power for modules: 4 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- LED indicator
- Dimensions (LxWxH): ca. 100 x 70 x 9.5 mm



System requirements

- A free SATA interface

Package content

- Converter SATA > mSATA / CFast
- Mounting material
- User manual

Images



General

| | |
|------------------------|---|
| LED indicator: | power and activity |
| Supported memory card: | CFast 1.0 and 2.0 |
| Protection: | ESD (Electrostatic Discharge) Short circuit protection Overheating protection |

Interface

| | |
|--------------|-----------------------------|
| Connector 1: | 1 x SATA 6 Gb/s 22 pin plug |
| Connector 2: | 1 x mSATA slot |
| connector 3: | 1 x CFast slot |

Physical characteristics

| | |
|---------|--------|
| Length: | 100 mm |
| Width: | 70 mm |
| Height: | 9.5 mm |