


# Delock Converter M.2 Key M male > M.2 Key E slot for USB and PCIe modules

## Description

This converter by Delock converts the M.2 key M slot into a key E slot. It supports modules with USB and PCIe signal transfer.

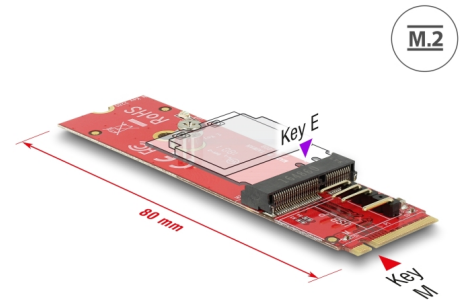

**Item no. 63343**

EAN: 4043619633432

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Technical details

- Connectors:
  - 1 x 67 pin M.2 key M male >
  - 1 x 67 pin M.2 key E slot
  - 1 x 4 pin USB 2.0 pin header
- Form factor: M.2 2280
- Supports modules in format 2230, 1630 and 3030 with key E or key A+E based on PCIe and USB
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Operating temperature: -40 °C ~ 80 °C
- Dimensions (LxWxH): ca. 80 x 22 x 5 mm
- OS independent, no driver installation necessary


## System requirements

- One free M.2 key M slot

## Package content

- Converter
- USB pin header cable 5 pin to 4 pin, length ca. 90 cm
- Mounting material
- User manual

## Images

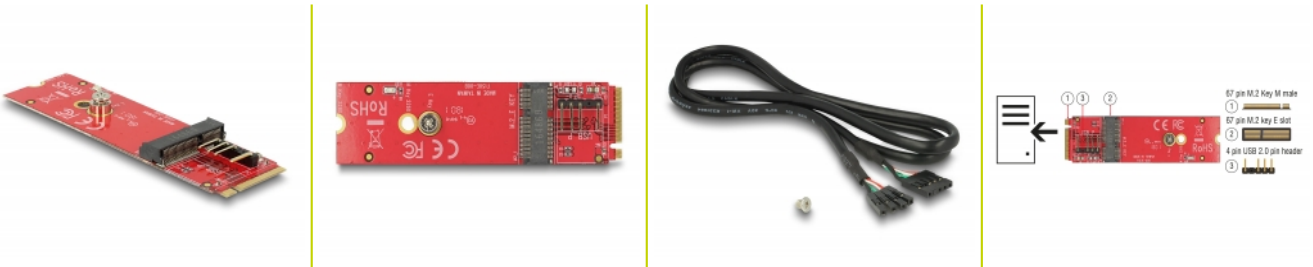

## General

Form factor:	M.2 2280
Supported operating system:	OS independent, no driver installation necessary
Supported module:	Supports modules in format 2230, 1630 and 3030 with key E or key A+E based on PCIe and USB
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

## Interface

Connector 1:	1 x 67 pin M.2 Key M male
Connector 2:	1 x 67 pin M.2 key E slot
connector 3:	1 x 4 pin USB 2.0 pin header

## Physical characteristics

Length:	80 mm
Width:	22 mm
Height:	5 mm