

Delock Converter for M.2 NVMe PCIe SSD with USB 3.1 Gen 2

Description


This converter by Delock enables the installation of an **M.2 PCIe NVMe** SSD in 2280, 2260 and 2242 format, it can be connected via USB to the PC or laptop.

Ideal test equipment

Due to the **USB-A** connector and the direct installation of the SSD on the board, without enclosure, the Delock converter is most suitable as test equipment.

Note

There is no support for SATA M.2 SSD.

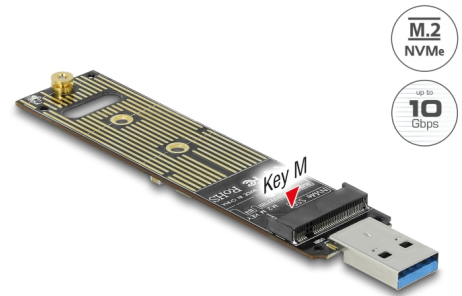

Item no. 64069

EAN: 4043619640690

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-A male
 - 1 x 67 pin M.2 key M slot
- Chipset: JMicron JMS583
- Supports M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe (NVMe)
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- Data transfer rate up to 10 Gbps
- LED indicator for power and access
- Bootable
- Dimensions (LxWxH): ca. 110 x 22 x 6 mm
- Plug & Play


System requirements

- Chrome OS 71.0 or above
- Linux Kernel 4.9.4 or above
- Mac OS 10.14 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC or laptop with a free USB Type-A port

Package content

- M.2 converter
- Mounting material
- Screwdriver
- User manual

Images



General

Function:	Bootable, ex UEFI 2.3.1 NVM Express (NVMe) Plug & Play
Supported operating system:	Chrome OS 71.0 or above Linux Kernel 4.9.4 or above Mac OS 10.14.1 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
LED indicator:	power and activity
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Connector 1:	1 x USB 10 Gbps Type-A male (host)
Connector 2:	1 x 67 pin M.2 key M slot