


Delock RJ50 2 x female to 2 x Terminal Block with push-button for DIN rail angled

Description

This adapter by Delock can be used to connect various control and measuring devices. Strands with stripped ends can be connected via the terminal block toolfree.

DIN rail mounting

With the clips included in the delivery content, the adapter can be attached to a 15 mm or 35 mm wide DIN rail.

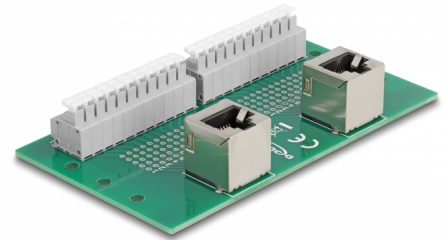

Item no. 67015

EAN: 4043619670154

Country of origin: China

Package: Box

Technical details

- Connectors:
 - 2 x RJ50 female angled
 - 2 x 11 pin terminal block
- Pin assignment: 1:1
- Pitch: 3.81 mm
- Useable for a cable gauge from 24 to 12 AWG
- DIN rail mounting: 15 mm and 35 mm
- Operating temperature: -40 °C ~ 100 °C
- Dimensions (LxWxH): ca. 91 x 60 x 18 mm




System requirements

- Two free RJ50 male
- 15 mm or 35 mm DIN rail

Package content

- Adapter
- 2 x DIN rail clip
- 5 x screws

Images



General

Suitable for conductor gauge:	24 - 12 AWG
Mounting type:	DIN rail mounting: 15 mm and 35 mm

Interface

Connector 1:	2 x RJ50 female angled
Connector 2:	2 x 11 pin terminal block

Technical characteristics

Operating temperature:	-40 °C ~ 100 °C
------------------------	-----------------

Physical characteristics

Pitch distance:	3.81 mm
Length:	91 mm
Width:	60 mm
Height:	18 mm