

Delock Active USB 3.2 Gen 1 Cable USB Type-A to USB Type-B 10 m

Description

This active USB cable by Delock with integrated signal amplifiers is used to connect devices with USB Type-B female port to a PC or laptop with USB Type-A port.

To ensure reliable data and power transmission, the included power supply unit must be connected to the cable via the DC socket on one of the signal amplifiers.



10 m

Item no. 85380

EAN: 4043619853809

Country of origin: China

Package: White Box

Technical details

- Connectors:
 - 1 x SuperSpeed USB (USB 3.2 Gen 1) Type-A male >
 - 1 x SuperSpeed USB (USB 3.2 Gen 1) Type-B male
 - 1 x DC jack
- Chipset: Genesys Logic GL3523
- Status LED
- Cable gauge:
 - 28 AWG data line
 - 24 AWG power line
- Cable diameter: ca. 5.5 mm
- Data transfer rate up to SuperSpeed USB 5 Gbps
- Colour: black
- With 2 signal amplifiers (at intervals of 5 m)
- Dimensions of signal amplifier (LxWxH): ca. 6.7 x 2.2 x 1.2 cm
- Length incl. connectors: ca. 10 m

Power supply specification

- Wall power supply
 - Input: AC 100 ~ 240 V / 50 ~ 60 Hz / 0.25 A
 - Output: 5 V / 1 A
 - Ground outside, plus inside
 - Dimensions:
 - inside: \varnothing ca. 1.1 mm
 - outside: \varnothing ca. 3.5 mm
 - length: ca. 7.0 mm
-


System requirements

- PC or laptop with a free USB Type-A port
-

Package content

- USB 3.2 Gen 1 cable
 - External power supply
-

Images

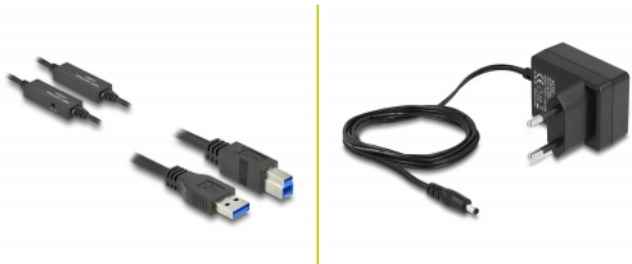

General

Specification:	SuperSpeed USB (USB 3.2 Gen 1)
----------------	--------------------------------

Interface

Connector 1:	1 x USB 5 Gbps Type-A male
Connector 2:	1 x USB 5 Gbps Type-B male

Technical characteristics

Chipset:	Genesys Logic GL3523
Data transfer rate:	5 Gbps

Physical characteristics

Conductor gauge:	28 AWG data line 24 AWG power line
Length:	10 m
Colour:	black

Power supply

Type:	Euro wall power supply
Input:	AC 100 - 240 V / 50 - 60 Hz / 0.25 A
Output:	5 V / 1 A
Connector:	DC male 3,5 mm x 1,1 mm