


# Delock Optical Fiber Cable CS male to LC Duplex singlemode G657A2 / OS2 Uniboot 3 m

## Description

This optical cable by Delock can be used to connect transceivers with CS interface and for cabling the optical fiber network in data centres.

### CS connector

The CS (Connector Senko) plug belongs to the Very Small Form Factor (VSFF) connectors and has a smaller form factor than comparable LC Duplex connectors. The plug is particularly suitable for applications with high packing density. The push-pull tab on the connector makes it easy to plug and unplug.

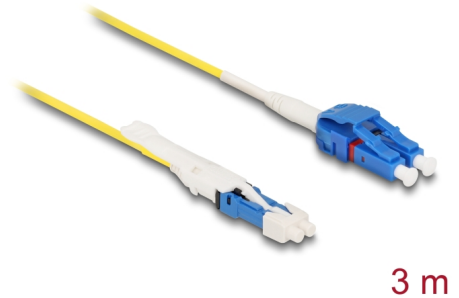

**Item no. 88315**

EAN: 4043619883158

Country of origin: China

Package: Zip poly bag

## Technical details

- Connectors:
  - 1 x CS plug
  - 1 x LC Duplex
- Singlemode G657A2 / OS2 cable
- Fibre: 9/125 µm
- Zirconia ceramic ferrule with protection cap
- Uniboot connector
- Polarity A/B can be changed without tools
- Push pull tab
- Cable diameter: ca. 2 mm
- Insertion loss < 0.2 dB
- Return loss > 55 dB
- Operating temperature: -20 °C ~ 70 °C
- LSZH (halogen-free)
- Colour: yellow
- Length incl. connectors: ca. 0.5 m

## Package content

- Optical fiber cable

---

## Images



## Interface

|              |               |
|--------------|---------------|
| Connector 1: | 1 x CS plug   |
| Connector 2: | 1 x LC Duplex |

## Technical characteristics

|                        |                |
|------------------------|----------------|
| Operating temperature: | -20 °C ~ 70 °C |
|------------------------|----------------|

## Physical characteristics

|                 |                     |
|-----------------|---------------------|
| Material:       | LSZH (halogen-free) |
| Length:         | 3 m                 |
| Colour:         | yellow              |
| Cable diameter: | 2 mm                |