


Delock PCI Express x4 Card to 1 x internal USB 10 Gbps Type-E Key A 20 pin female

Description

This PCI Express card by Delock expands the PC by one internal **USB 3.2 key A 20 pin female** port. Various cables can be connected to the card, to provide either one USB Type-C™ or one USB Type-A interface.

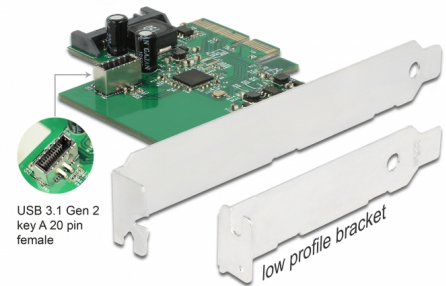

Item no. 89029

EAN: 4043619890293

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Connectors:
 - internal:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) key A 20 pin female
 - 1 x SATA 15 pin power plug
 - 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142
- Data transfer rate up to:
 - SuperSpeed USB 10 Gbps,
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Compliant with USB Attached SCSI Protocol (UASP) Rev. 1.0


System requirements

- Linux Kernel 4.4 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Optional: power supply with a free SATA power connector

Package content

- PCI Express card
- Low profile bracket
- User manual

Images



General

| | |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Specification: | USB 10 Gbps |
| Supported operating system: | Linux Kernel 4.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit |

Interface

| | |
|-----------|-----------------------------------------------------------------------------------------------|
| Internal: | 1 x PCI Express x4, V3.0 1 x USB 10 Gbps key A 20 pin female 1 x SATA 15 pin power plug |
|-----------|-----------------------------------------------------------------------------------------------|

Technical characteristics

| | |
|---------------------|-----------------|
| Chipset: | Asmedia ASM3142 |
| Data transfer rate: | 10 Gbps |

Physical characteristics

| | |
|---------------|-------------------------|
| Slot bracket: | Low Profile standard |
|---------------|-------------------------|