


# Delock PCI Express x4 Card > 1 x internal NVMe M.2 PCIe / 1 x internal SFF-8643 NVMe – Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by one M.2 slot. One M.2 module in 2280, 2260, 2242 or 2230 format can be connected. Furthermore e.g. one SSD with U.2 interface can be connected by using an optional cable. Only one interface can be used, if both are occupied only the M.2 slot can be used.

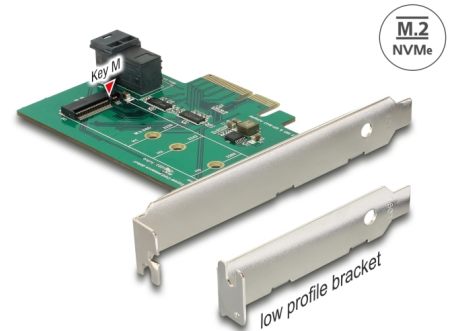

**Item no. 89517**

EAN: 4043619895175

Country of origin: Taiwan, Republic of China

Package: Retail Box

## Technical details

- Connector:
  - internal:
    - 1 x 67 pin M.2 key M slot
    - 1 x PCI Express x4, V3.0
    - 1 x 36 pin SFF-8643 female
- Interface: PCIe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- Bootable, from UEFI version 2.3.1 (M.2 slot)
- Maximum output current: 4 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- LED indicator
- Power supply via PCI Express

- Supports NVM Express (NVMe)

---

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64/11, Linux Kernel 3.2
- PC with one free PCI Express x4 / x8 / x16 / x32 slot


---

## Package content

- PCI Express card
- Low profile bracket
- 3 x fixing screw
- User manual

---

## Images

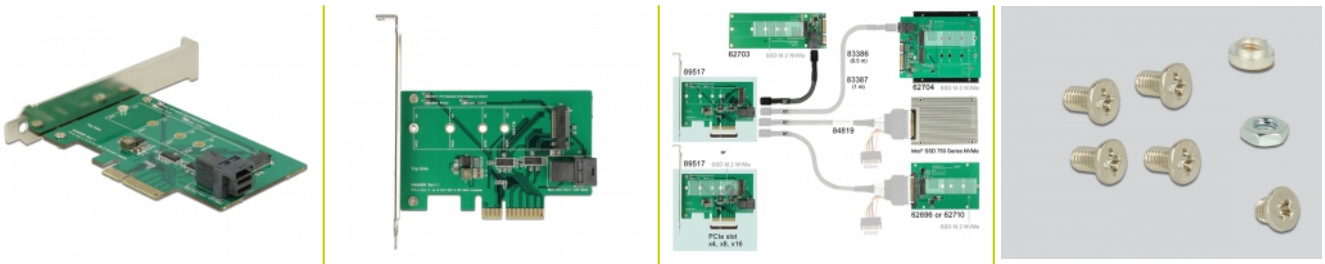

## General

Function:	bootable
Supported operating system:	Linux Kernel 3.2 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
LED indicator:	power and activity
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported

## Interface

Internal:	1 x 67 pin M.2 key M slot 1 x PCI Express x4, V3.0 1 x 36 pin SFF-8643 female
-----------	---

## Technical characteristics

Maximum current:	4 A
------------------	-----

## Physical characteristics

Slot bracket:	Low Profile standard
---------------	----------------------