


# Delock PCI Card > 1 x Serial RS-232

## Description

This PCI card by Delock expands a PC by one external serial port. Different devices such as scanner, printer, mouse etc. can be connected to this card. By using the included low profile bracket, the PCI card can be also installed into a Mini-PC.

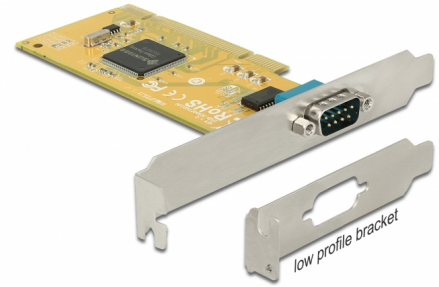

**Item no. 89592**

EAN: 4043619895922

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:  
external: 1 x serial RS-232 DB9 male  
internal: 1 x 32-Bit PCI standard 3.0
- Chipset: SUN1989
- Compliance with PCI 33 MHz Ver. 3.0/2.3/2.2./2.1 specification
- Supports both 64-bit & 32-bit PCI bus slots and 3.3 V & 5 V power
- Signals: DCD, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI
- ±2 kV ESD protection for all serial signals
- Data transfer rate up to 115.2 Kb/s
- FIFO: 128 byte
- Compatible with 16C950 UART
- Operating temperature: 0 °C ~ 60 °C
- Humidity: 5 ~ 95 %
- Windows WHQL certified

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64/11, Linux ex Kernel 2.6.38
- PC with one free PCI slot



---

## Package content

- PCI card
- 1 x low profile bracket
- Driver CD
- User manual

---

## Images



## General

Supported operating system:	Linux Kernel 2.6.38 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2012 R2 Windows Server 2012 Windows Server 2016 Windows 11
Protection:	ESD (Electrostatic Discharge)

## Interface

External:	1 x Serial RS-232 DB9 male
Internal:	1 x PCI V3.0/2.3/2.2/2.1

## Technical characteristics

Chipset:	SUNIX
Data transfer rate:	up to 115,2 Kb/s
FIFO:	128 byte
Operating temperature:	0 °C ~ 60 °C
Humidity:	5 ~ 95 %
UART:	16C950

## Physical characteristics

Slot bracket:	Low Profile standard
Length:	120 mm
Width:	51 mm
Height:	6.6 mm



