


Delock PCI Express x1 Card > 1 x internal M.2 Key E - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by one M.2 key E slot. Different M.2 modules with USB and PCIe signals can be inserted in the card. On the M.2 key A or key E interface can be used e.g. WLAN, Bluetooth, GNSS, 3G, HSPA and NFC modules. Further it is possible to use both functions of a module which has e.g. WLAN and Bluetooth. The USB modules need to be connected via the USB interface of the card to the system.

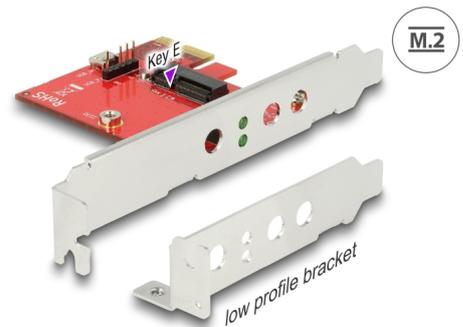

Item no. 89889

EAN: 4043619898893

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Connectors:
 - 1 x 67 pin M.2 key E slot
 - 1 x PCI Express x1
 - 1 x USB 2.0 Type Micro-B female (for M.2 USB modules)
 - 1 x USB 2.0 pin header male (for M.2 USB modules)
- Interface: PCIe + USB
- Supports modules in format 2230, 1630 and 3030 with key E or key A+E based on PCIe and USB
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- 2 x LED indicator
- Each slot bracket with 3 x hole for antenna connector
- OS independent, no driver installation necessary

System requirements

- PC with one free PCI Express slot

Package content

- PCI Express card
- Low profile bracket
- USB pin header cable 5 pin to 4 pin, length ca. 90 cm
- User manual

Images



General

Supported operating system:	OS independent, no driver installation necessary
LED indicator:	2 x
Slot:	PCIe USB
Supported module:	Supports modules in format 2230, 1630 and 3030 with key E or key A+E based on PCIe and USB
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Connector 1:	1 x 67 pin M.2 key E slot
Connector 2:	1 x PCI Express x1
connector 3:	1 x USB 2.0 Type Micro-B female (for M.2 USB modules)
connector 4:	1 x USB 2.0 pin header male (for M.2 USB modules)