


# Delock 3 port SATA and 2 slot M.2 Key B PCI Express x4 Card - Low Profile Form Factor

## Description

The PCI Express card by Delock expands a PC by **three internal SATA ports and two M.2 slots**. Different devices such as SSDs, hard drives, DVD-drives etc. and two M.2 modules in 2280, 2260, 2242 or 2230 format can be connected to the card.

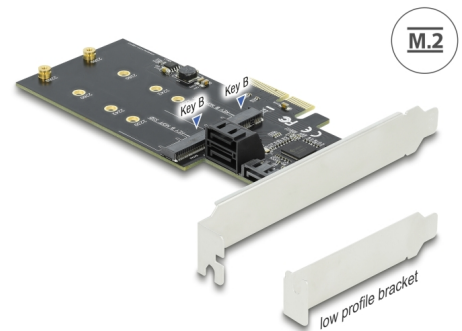

**Item no. 90499**

EAN: 4043619904990

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:
  - internal:
    - 3 x SATA 6 Gb/s 7 pin plug
    - 2 x 67 pin M.2 key B slot
    - 1 x PCI Express x4, V3.0
- Chipset: JMicron JMB585
- 5 x LED indicator
- Interface: SATA
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Swap
- Bootable

---

## System requirements

- Linux Kernel 3.3 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot


---

## Package content

- PCI Express card
- Low profile bracket
- 3 x SATA cable, length ca. 35 cm
- Screwdriver
- User manual

---

## Images



## General

Function:	Hot Swap bootable
Supported operating system:	Linux Kernel 3.3 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
LED indicator:	5 x
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA

## Interface

Internal:	1 x PCI Express x4, V3.0 2 x 67 pin M.2 key B slot 3 x SATA 6 Gb/s 7 pin plug
-----------	---

## Technical characteristics

Chipset:	JMicron JMB585
Data transfer rate:	6 Gb/s