

Delock 5.25" Mobile Rack for 8 x M.2 NVMe SSD with Slim SAS SFF-8654 connector

Description

This solid metal mobile rack by Delock can be installed into a **5.25" bay** of a PC, IPC or server enclosure and enables the operation of up to **8 M.2 NVMe SSD**. To ensure the maximum speed at each port, **each slot has its own Slim SAS SFF-8654 connector**.

Quick change of SSD


Due to the special mechanism, the **SSD can be exchanged quickly and easily**. For example, data backups can be taken and stored in a safe place.

Tray with key lock and springs

The mobile rack is equipped with a **key lock** to prevent unauthorised access. The stable carrier of metal has springs on the top and bottom which **reduce vibrations** and therefore support its use in mobile devices.

Note

Special care must be taken that the tray is fully inserted, otherwise no connection to the SSD can be established.

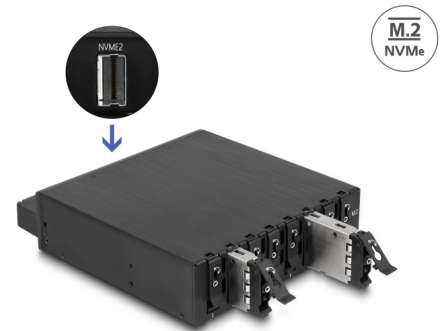

Item no. 47129

EAN: 4043619471294

Country of origin: China

Package: Box

Technical details

- Connectors:
 - internal:
 - 8 x M.2 key M slot
 - external:
 - 8 x Slim SAS SFF-8654 4i female
 - 2 x 4 pin power connector
- Compatible to PCI Express V4.0
- Interface: PCIe / NVMe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported

- 8 x LED indicator
- 3 x fan
- Bootable, ex UEFI version 2.3.1
- M.2 tray made of metal
- Supports NVM Express (NVMe)
- Supports S.M.A.R.T.
- Key lock
- Dimensions (LxWxH): ca. 174 x 145 x 40 mm


System requirements

- Linux Kernel 6.2 or above
- Windows 10/10-64/11
- Windows Server 2022
- A free Slim SAS SFF-8654 port for each M.2 slot
- Power supply with a free SATA power connector

Package content

- Mobile Rack with 8 x M.2 tray
- 2 x cable SATA 15 pin to 4 pin Floppy female, length ca. 12 cm
- 2 x keys
- 8 x screw IM 2.0 x 4.0 mm, head 5.0 mm
- User manual

Images

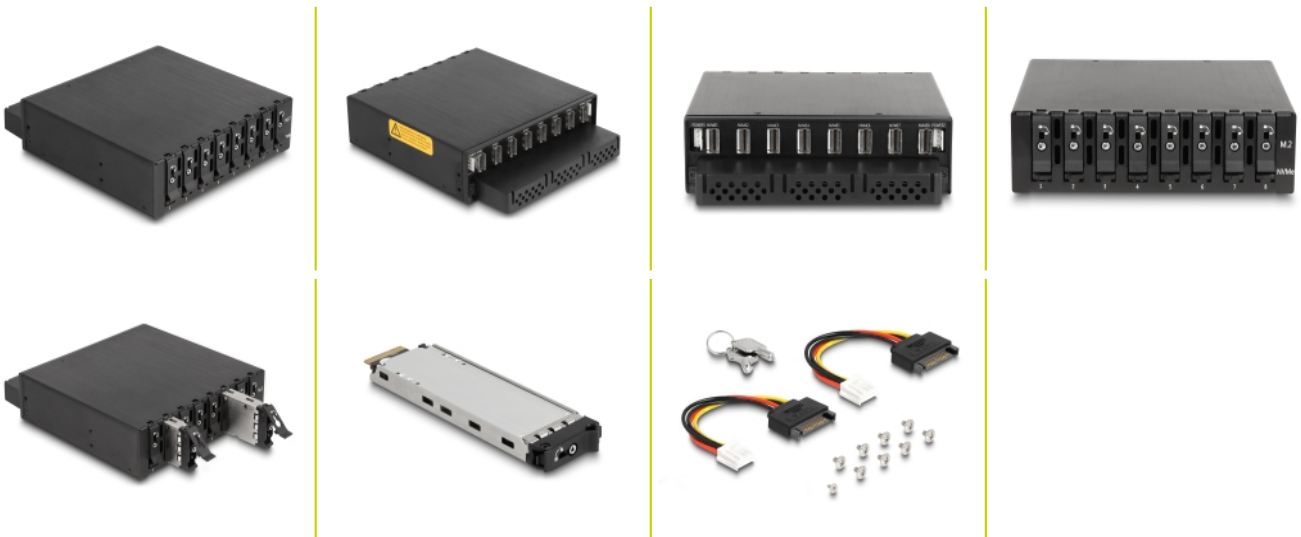

General

Form factor:	5.25"
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 11 Windows Server 2022 Linux Kernel 6.2 or above

Interface

External:	2 x 4 pin Floppy male 8 x Slim SAS SFF-8654 4i female
Internal:	8 x M.2 key M slot

Physical characteristics

Housing material:	metal
-------------------	-------