


# Delock PCI Express x1 Card to 4 x Serial, 1 x Parallel

## Description

This PCI Express card by Delock expands the PC by four external serial ports and one external parallel port. Different devices, such as scanner, printer, mouse etc., can be connected to the card.

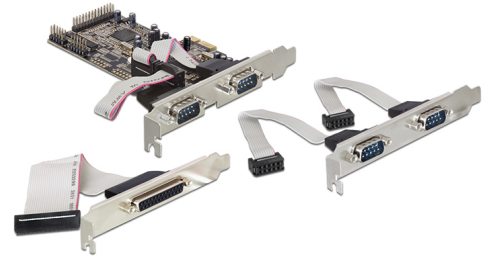

**Item no. 89177**

EAN: 4043619891771

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:
  - external:
    - 2 x serial RS-232 DB9 male
    - 2 x serial RS-232 DB9 male (separate rear bracket)
    - 1 x Parallel DB25 female (separate rear bracket)
  - internal:
    - 1 x PCI Express x1, V1.0a
- Chipset: Moschip MCS9922
- Data transfer rate:
  - serial up to 115.2 Kb/s
  - parallel up to 1.5 Mb/s
- FIFO: 16 byte
- SPP, EPP, ECP compatible to IEEE 1284
- Compatible with 16C550 UART serial port


## System requirements

- Windows Server-2003/Vista/7/8/8.1/10/10-64/11, Linux Kernel 2.6
- PC with one free PCI Express slot and two rear slot

## Package content

- PCI Express card
- 2 x rear bracket
- 5 x low profile bracket
- Driver CD
- User manual

## Images

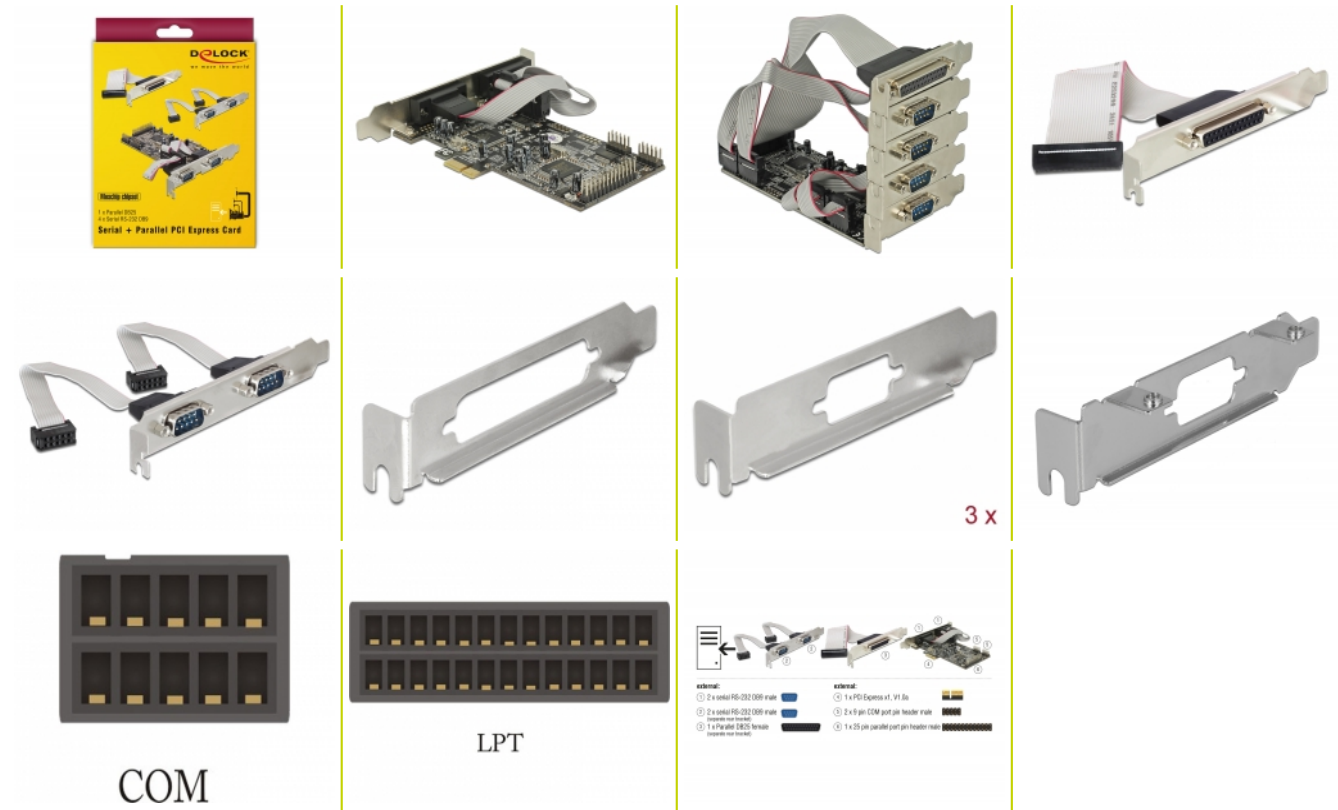

## General

Form factor:	Low Profile
Specification:	RS-232 (EIA / TIA) PCIe 1.1
Supported operating system:	Linux Kernel 2.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2003 32-bit Windows Server 2003 64-bit Windows Vista 32-bit Windows Vista 64-bit Windows 11
Slot:	PCIe

## Interface

External:	1 x Parallel DB25 female 1 x Serial RS-232 DB9 plug
Internal:	1 x PCI Express x1, V1.1

## Technical characteristics

Chipset:	ASIX MCS9922
Data transfer rate:	4 x up to 230,4 Kbps
FIFO:	4 x 256 Byte
UART:	16C450 / 16C550 / 16C650

## Physical characteristics

Slot bracket:	Low Profile standard
Colour:	black