

# Delock PCI Express x1 Card to 4 x Serial RS-232 with voltage supply 5 V / 12 V

## Description

The PCI Express card by Delock expands a PC by four external serial ports.

### Optional voltage supplies via RS-232

Connected devices can optionally be supplied with voltages of 5 V or 12 V. The following four outputs are available on the RS-232 ports: pin 1 (DCD), pin 4 (DTR), pin 8 (CTS) and pin 9 (RI).

### Low Profile Form Factor

By using the included low profile bracket, the PCI Express card can be also installed into a Mini-PC.



**Item no. 89895**

EAN: 4043619898954

Country of origin: China

Package: Box

## Technical details

- Connectors:
  - internal:
    - 1 x PCI Express x1, V2.0
    - 1 x power connector 4 pin Molex male
  - external: 1 x DB44 female
  - connecting cable: DB44 male > 4 x serial RS-232 DB9 male
- Chipset: MaxLinear 17V354
- Compatible with 16C550 UART
- Data transfer rate up to 230.4 Kbps
- Databits: 5, 6, 7, 8
- Stop bits: 1, 1.5, 2
- Parity: even, odd, none, mark, space
- FIFO: 256 byte
- ±15 kV ESD protection on all signal pins
- 5 V or 12 V can be set individually for each port through the jumper (Pin 1/4/8/9)
- Electrical power per port: max. 7.5 watt (5 V / 1.5 A)
- Electrical power per port: max. 18 watt (12 V / 1.5 A)
- I/O address and IRQ assigned by BIOS
- Dimensions (LxW): ca. 80 x 55 mm


## System requirements

- Windows 8.1/8.1-64/10/10-64/11
- PC with one free PCI Express slot
- Power supply with a free Molex power connector

## Package content

- PCI Express card
- Low profile bracket
- 1 x serial connecting cable (ca. 30 cm)
- Driver CD
- User manual

## Images

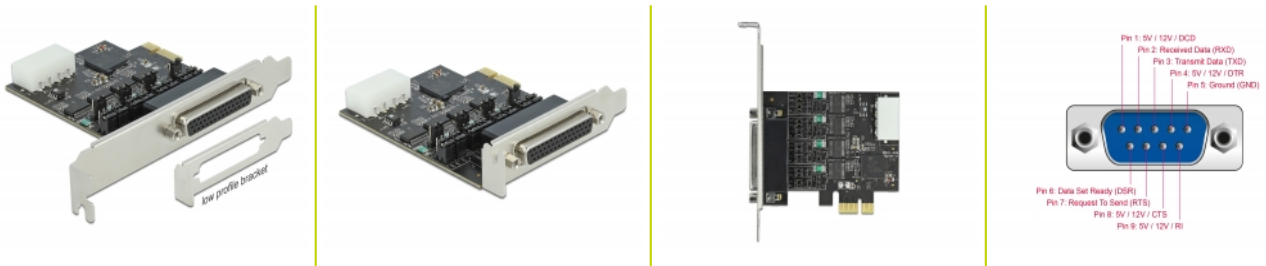

### General

Form factor:	Low Profile
Function:	Power over Serial
Specification:	RS-232 (EIA / TIA) PCI Express 2.0
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11
Slot:	PCIe

### Interface

External:	1 x Serial RS-232 DB9 plug
Internal:	1 x PCI Express x1 , V2.0

### Technical characteristics

Chipset:	MaxLinear XR17V354
Data transfer rate:	4 x up to 128 Kbps
FIFO:	4 x 256 Byte
Jumper:	20 x
Maximum current:	1500 mA per port
Voltage:	Power over System (POS) Optional 5 V - 12 V
UART:	16C550

### Physical characteristics

Slot bracket:	Low Profile standard
Colour:	black