


Delock PCI Express x1 Card to 2 x Serial RS-232

Description

The PCI Express card by Delock expands a PC by two external serial ports. Different devices such as scanner, printer, mouse etc. can be connected to this card. By using the included low profile brackets, the PCI Express card can be also installed into a Mini-PC.

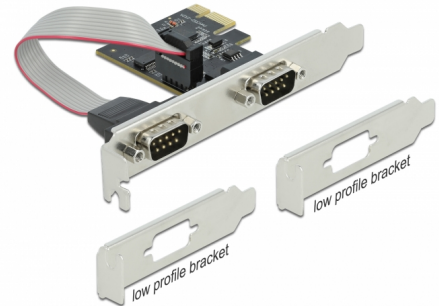

Item no. 90001

EAN: 4043619900015

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - external: 2 x serial RS-232 DB9 male
 - internal: 1 x PCI Express x1, V2.0
- Chipset: MaxLinear XR17V352
- Data transfer rate up to 230.4 Kbps
- FIFO: 256 byte
- Compatible with 16C550 UART
- Databits: 5, 6, 7, 8
- Stop bits: 1, 1.5, 2
- Parity: even, odd, none, mark, space
- Flow control: none, hardware RTS / CTS, software XON / XOFF
- Dimensions (LxW): ca. 64 x 45 mm


System requirements

- Windows 8.1/8.1-64/10/10-64/11
- PC with one free PCI Express slot

Package content

- PCI Express card
- 2 x low profile bracket
- Driver CD
- User manual

Images



General

Form factor:	Low Profile (MD1)
Specification:	RS-232 (EIA / TIA) PCI Express 2.0
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11
Slot:	PCIe

Interface

Connector 1:	1 x PCI Express x1
Connector 2:	2 x serial RS-232 DB9 plug

Technical characteristics

Chipset:	Exar 17V352
Data transfer rate:	up to 230.4 Kb/s
FIFO:	1 x 256 Byte
Signal transmission:	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
Data transmission:	asynchronous Bi-directional Half duplex full duplex
UART:	16C550
Data bits:	5, 6, 7, 8

Physical characteristics

Screw type:	#4-40 UNC
Slot bracket:	Low Profile standard

Width:	45 mm
Height:	64 mm
Colour:	black